



BOEN

Attention to detail

Stair Nosing Profiles
and Skirtings

YOUR STYLE · YOUR FLOOR

“The details are not the details, they make the design”

Charles Eames



Oak Andante White

Attention to detail

When planning your installation remember to think about the little details that will make your interior really stand out by matching your floor to your skirting and stairs. This will enhance your interior design by naturally combining materials.

Make your stairs a feature by linking the upstairs and downstairs by complimenting floors, very often the clearest view of a staircase is from the bottom of the stairs.



Oak Andante White
Live Pure



Matching skirtings make the room look complete

Ash Andante White




Oak Traditional Chalet

SKIRTINGS AND STAIR NOSING PROFILES MATCHING THE FLOOR



Colours for every style and taste

When renovating a room or building a house create a seamless connection between the floor, skirtings and stairs by keeping the design simple and combine beautiful colours and structure.

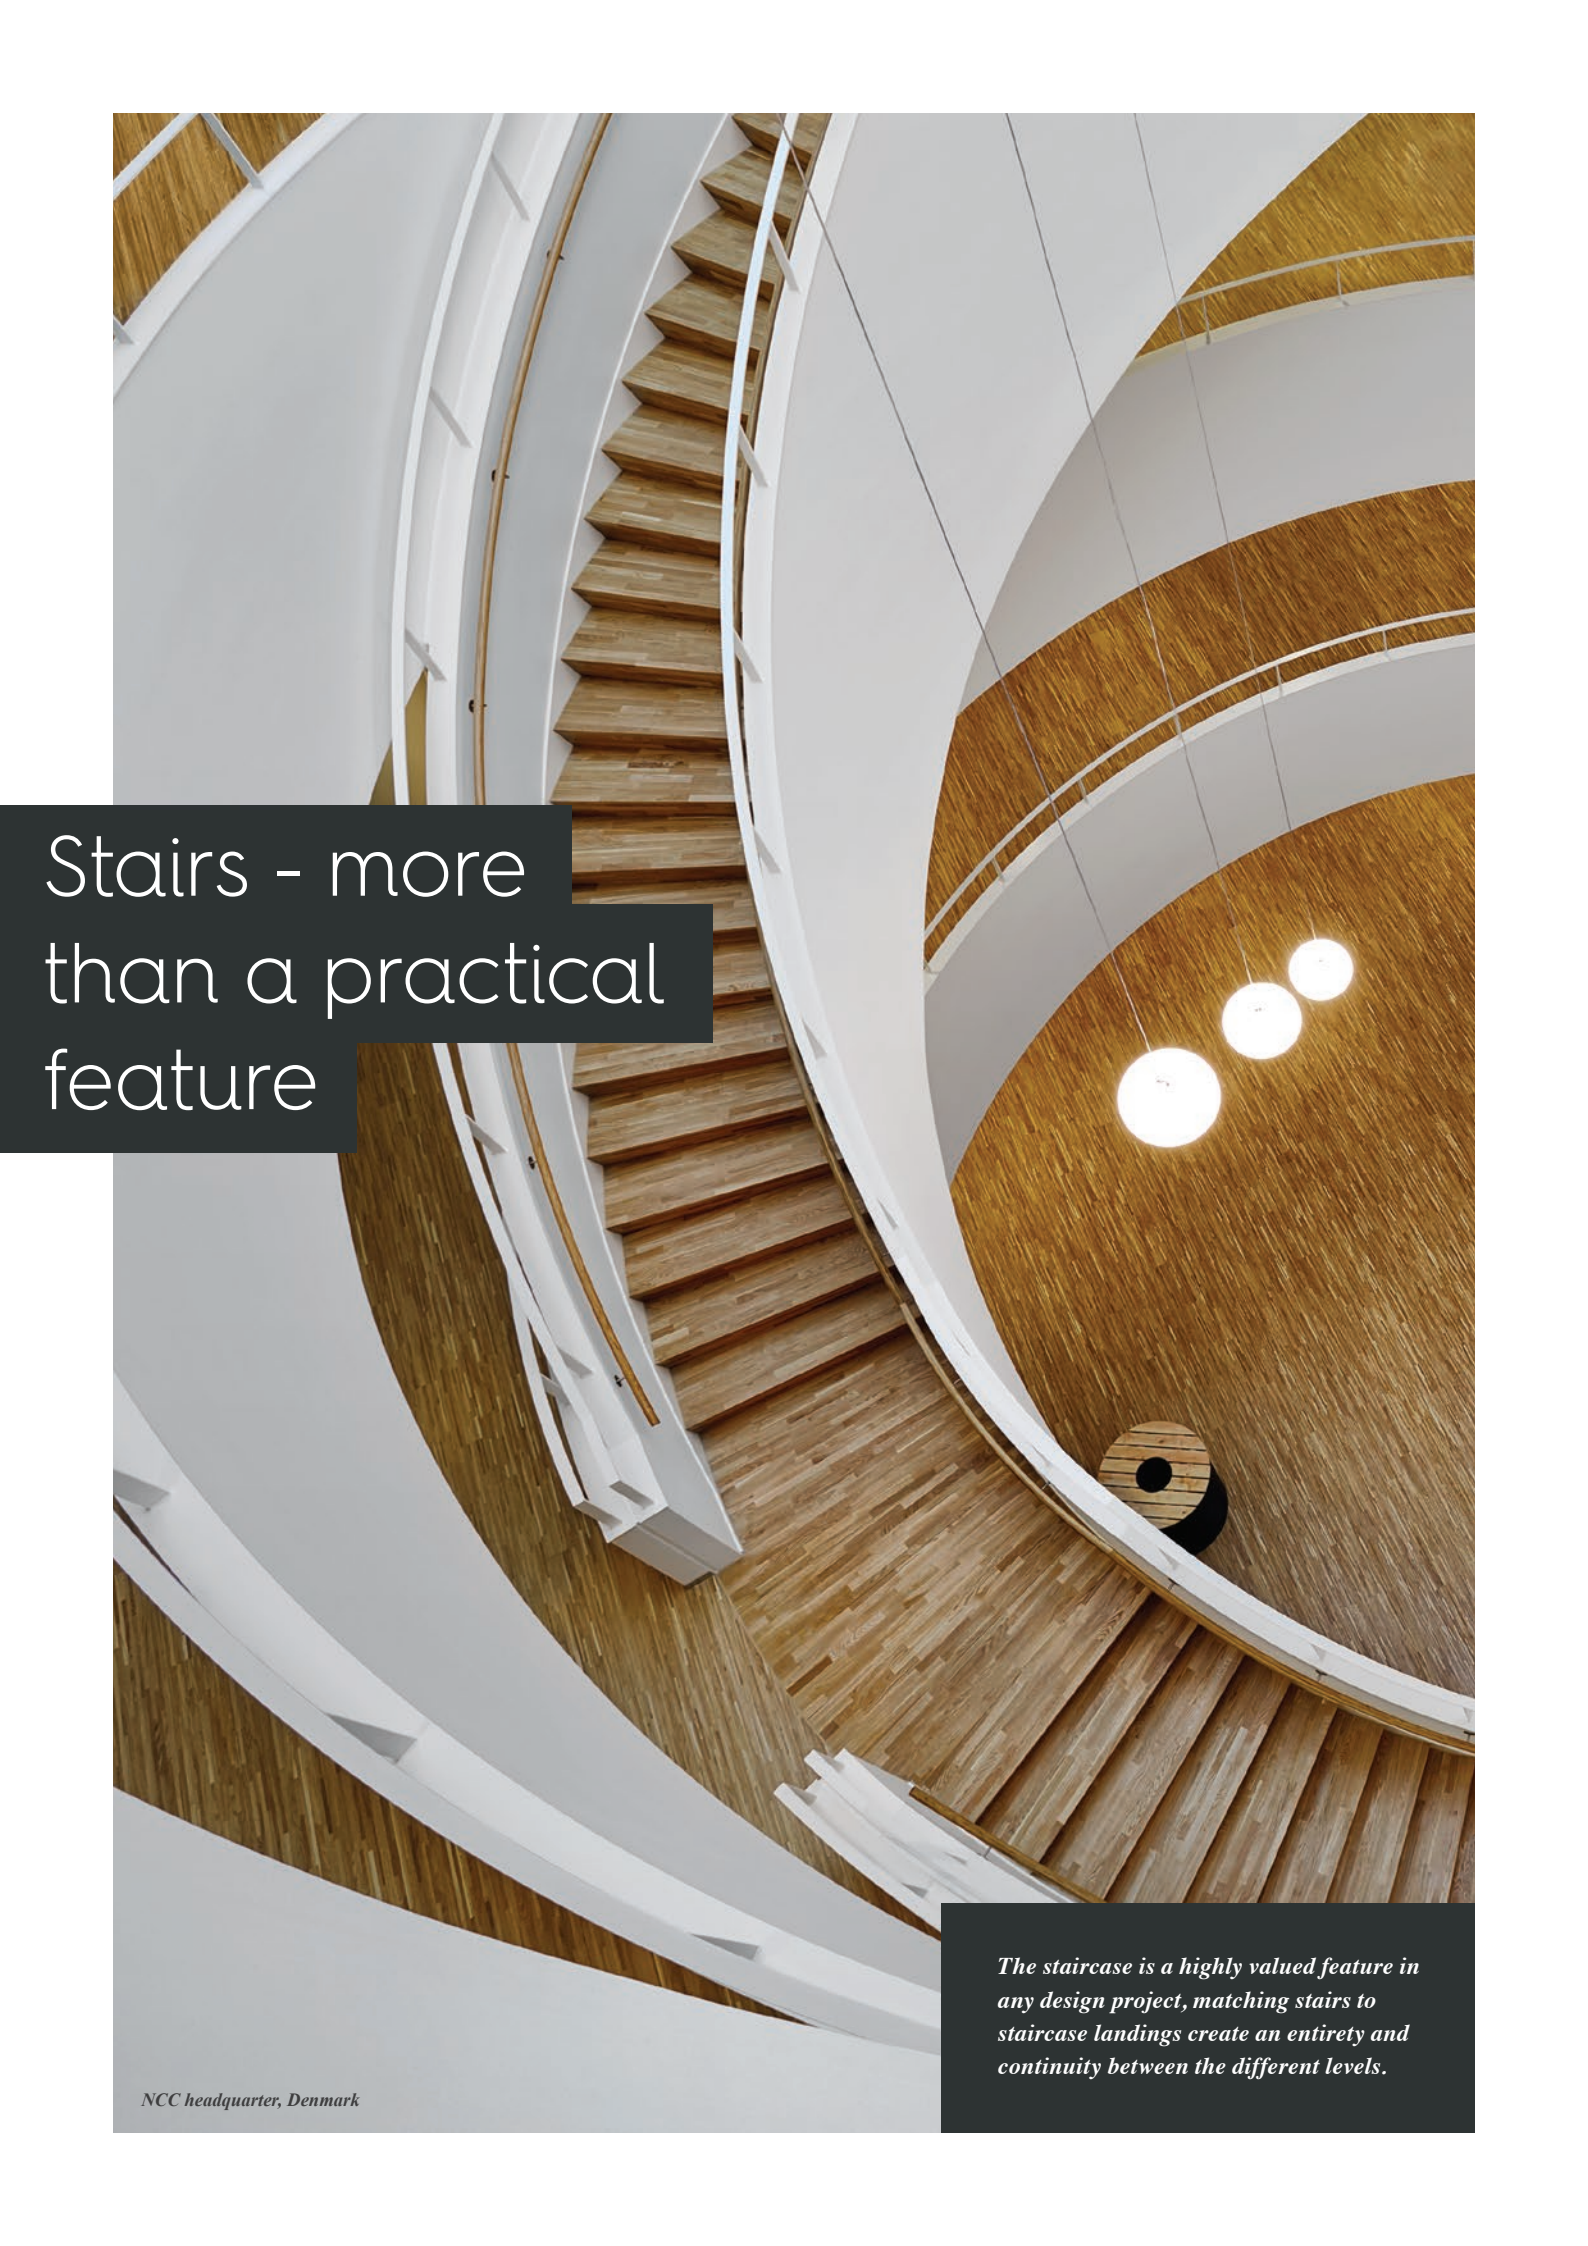

Stairs - more than a practical feature

The staircase is a highly valued feature in any design project, matching stairs to staircase landings create an entirety and continuity between the different levels.

Origami folding technique



Innovative folding technique

This new folding technique we call "Origami Tech" features a bevel making the stair edge more robust.

This new process preserves the factory applied surface finish. The edges are folded, thus they are as well protected as your hardwood flooring.

Stair nosing profiles for individual solutions

BOEN offers matching stair nosing profiles for every floor which includes the same surface protection as your new floor, with many options to make your dream living space a reality. We can supply extra edge bands for open stairs and built-in tread inlays for your safety.

A complete solution!



By using an innovative milling and folding technology, BOEN has transformed a once manual labor process into streamlined industrial production, ensuring consistently flawless results. This empowers professionals to enhance efficiency and to deliver optimal outcomes to end customers.

- 1. Stair nosing profiles made from flooring boards***
- 2. Available for all our floors and colours***
- 3. Outstanding edge strength***
- 4. Fits all types of stairs***
- 5. Edge bands for open stairs***


Your stairs. your choice.

When choosing your stairs, select the design that feels right for you. Pick out the stair model that fits your style and your house. The choice of surface can create an exciting contrast or stand in style with the rest of the interior. Using the same flooring throughout the space will create a clean, continuous appearance.




Open stairs

Contemporary, light and elegant, open stairs can make an eye-catching statement. Covered with hardwood flooring, you enhance warmth and naturalness.

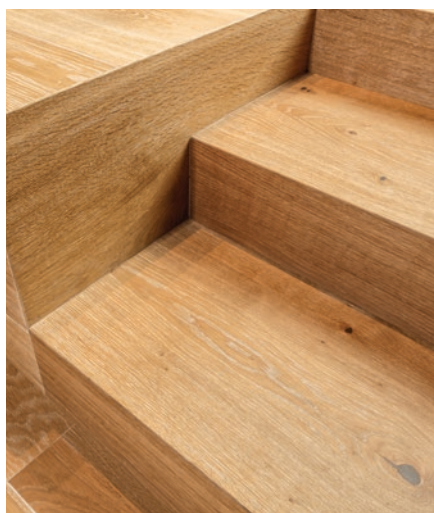

Classic stairs

Wooden stairs have their own charm and enhance the room with their look and scent. Precision work and skilled experience are required from the craftsman to deliver the highest quality.

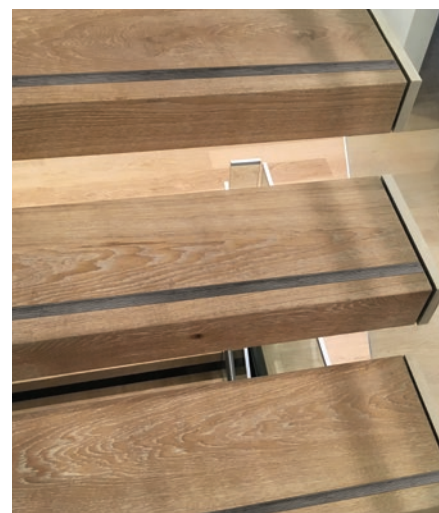


Think safety

All our stair nosing profiles can be delivered with built-in tread inlays. They help to visualize each step and provide additional safety.

Easier installation

Individualize your stairs. Order stair nosing profiles and the related edge bands to cover the sides of the steps; perfectly matching your flooring. Edge band is available up to 700 x 100mm and delivered with a 4-sided bevel (4V).

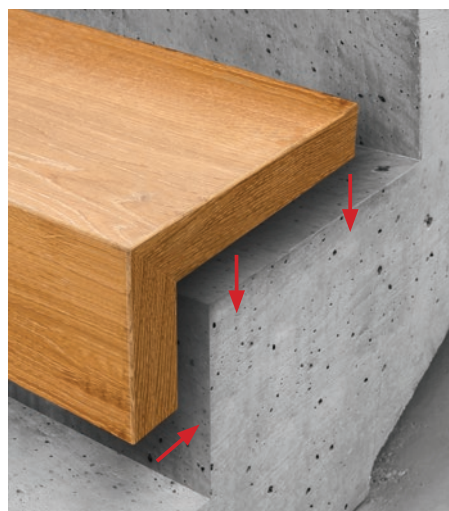

Seamless connection

BOEN offers stair nosing with a broader tread area (up to 154 mm) to ensure the perfect transition from stairs to the continuing 1-strip floor. It creates a seamless and perfect flow between stairs and flooring. The results are impressive when laying wider plank flooring.

Profile overview


We offer stair nosing profiles made from flooring boards in all BOEN colours, surfaces and formats.

Stair nosing profiles for classic stairs

for BOEN Click 3-layer products

56 x 83 x 2200 mm


Click profile at the bottom edge.



(● Optional bevel).


for BOEN 2-layer products

40 x 101 x 1150mm; Tongue and groove profile at bottom edge.

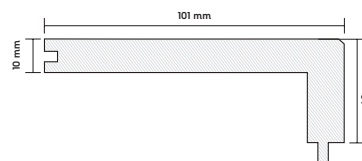

for Chalet/Chaletino plank

62 x 85 x 1370mm; Tongue and groove profile at bottom edge.




Stair nosing profiles for open stairs

for BOEN Click 3-layer products

56 x 69 x 2200mm

Veneer at bottom edge.




(● Optional bevel).

for BOEN 2-layer products

40 x 101 x 1150mm


Veneer at bottom edge.

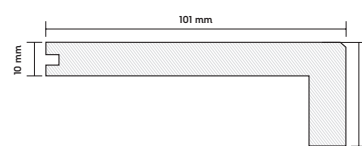

for Chalet/Chaletino plank

62 x 85 x 1370mm

Veneer at bottom edge.



Available on request:

- ▶ Different tread and riser dimensions.
- ▶ Edge bands to finalize the open sides of your stairs:
The format of the edge band is 3.5 x 700mm (3-layer) or 3.5 x 470mm (2-layer), whereas the height can be individually defined.
- ▶ Tread inlays in different widths (1cm, 2cm).
- ▶ Stair nosing profiles for other 2-layer products: Traffic.
- ▶ Stair nosing profiles with 14mm tongue and groove profile.



● Available colours for the tread inlays.


For more information and special options, please contact the BOEN sales team.

Our skirtings



BOEN offers skirtings made from flooring boards and veneered skirtings in the same colours as the corresponding hardwood flooring.

MATCHING SKIRTINGS

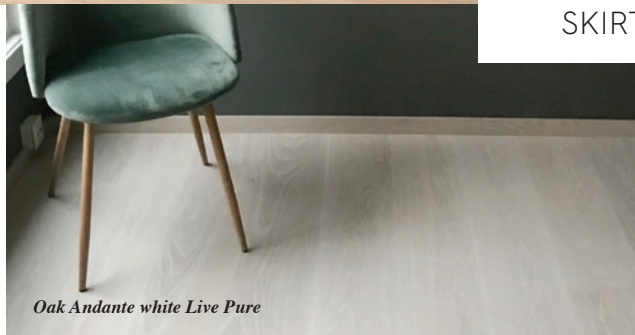

Choose skirtings in the same colour as your flooring and create a beautiful frame that enhances the whole room.

It is all about the details

Create harmony with the same skirtings as your flooring. This gives the impression of an extended floor. Bring forth a balance; it is the details that create the entirety, and a home. BOEN offers skirtings made from flooring boards which ensures that they are exactly the same colour as the flooring. Veneered skirtings are available in all BOEN flooring colours.

Beautiful

White skirtings attached to the wall will frame the floor by creating a look of distance.


In contrast, using skirtings that match the floor will give the appearance of a bigger room by extending up the floor on to the wall.



Veneered skirtings

- ▶ Available in all our flooring colours
- ▶ They have rounded edges and a veneered top-layer of 0.5mm.
- ▶ Due to a thickness of 16mm these skirtings are especially useful when you need to cover a bigger expansion gap.

- ▶ **Package content:**
1 bundle – 10 pieces
- ▶ **Dimension:**
16 x 58 x 2400 mm



Skirtings made from flooring boards

- ▶ These skirting boards are made from our high-quality multi-layer hardwood flooring.
- ▶ We produce them in all flooring colours, wood species and formats of the current range. The skirtings can be produced in our lacquered and oiled surface treatments Live Matt Plus, Live Matt, Live Pure and Live Natural.
- ▶ Skirtings out of handcrafted products are not possible.


- ▶ **Package content:**
1 bundle – 10 pieces
- ▶ **Dimension:**
14 x 55 x 2180mm



Skirting design 17

- ▶ Skirting boards with solid wood core and veneered white (RAL 9016).

- ▶ **Package content:**
1 bundle – 10 pieces
- ▶ **Dimension:**
16 x 58 x 2500 mm




MDF skirtings

- ▶ Elegant and classic traditional German profile made with an MDF core and veneered top-layer (RAL 9016).

- ▶ **Package content:**
1 bundle 18 x 70 mm - 12 pieces
1 bundle 18 x 100 mm - 7 pieces
1 bundle 18 x 120 mm - 5 pieces
- ▶ **Dimension:**
18 x 70/ 100/ 120 x 2500 mm

BOEN underlay

Choosing the correct underlay is important. A hardwood floor underlay has to be of high quality to reduce floor movement, risk reduction of squeaks and excellent audio characteristics reducing ambient noise.



Maxima

Maxima is an underlay recommended for wooden subfloors. Due to its high density, it will return to its original shape when installed under hardwood flooring. Choosing this type of underlay will help the hardwood floor to retain its original features and the risk of unwanted sound from the hardwood floor being reduced.


- ▶ Perfect for wooden subfloors due to high density (120 kg/m³).
- ▶ On concrete floors, use an additional layer of 0.2mm moisture barrier.
- ▶ Reduces walking sound inside the room with up to 16 %.
- ▶ Best choice for reducing impact sound (structure-borne noise), up to 21 dB.
- ▶ Thickness 2mm, Width 1m



Boengard

Boengard is the recommended underlay for concrete subfloors. With Boengard the plastic moisture barrier and the underlay itself is combined into one single product. This makes the laying job much easier and quicker, and the underlay has the same qualities as Maxima.

- ▶ Time-saving when laying on concrete.
- ▶ Do not use on wooden subfloors!
- ▶ Combined underlay with high density (100 kg/m³) and integrated moisture protection, overlap and self-adhesive strip.
- ▶ Reduces walking sound with up to 10 %.
- ▶ Reduces impact sound (structure-borne noise) with up to 20 dB.
- ▶ Thickness 2.2mm, Width 1m



Viscoh Air

High-end Polyolefin foam underlay for all subfloors. Based on new technology, this underlay has outstanding characteristics with regards to both sound reduction and retention of static and dynamic load.

- ▶ Can be used on all subfloors, very good shape-adaptability.
- ▶ On concrete floors, use an additional 0.2mm moisture barrier.
- ▶ Reduces walking sound inside the room with up to 30 %.
- ▶ Reduces impact sound (structure-borne noise) with up to 20 dB.
- ▶ Best choice when sound reduction on both walking sound and impact sound are important.
- ▶ Thickness 2mm, Width 1m

Good to know

- ▶ The subfloor must be dry, level and self-supporting. Concrete subfloors must be level and devoid of cement lumps, etc. The tolerance limit ± 3 mm per 2 running metres. For the UK: ± 3 mm over 3 running metres according to British Standard BS8204.
- ▶ Moisture barrier: The floor must not be exposed for moisture from the subfloor. An additional 0.2mm plastic foil has to be used on concrete floor to insulate against any remaining dampness.
- ▶ Impact sound: Structure-borne noise inside neighboring rooms when walking on the floor.
- ▶ Walking sound: Noise generated inside the room itself when walking on the flooring.
- ▶ Load resistance: An underlay with higher density or higher dynamic load reduces movement and the risk of unwanted sound both in the room itself and in neighboring rooms.

Care & maintenance

Whatever surface finish you have chosen, we have the right product for you.

Be nice to your hardwood floor.

It will repay you for a lifetime. High-quality sealed or oiled hardwood floors optimally protect the floor from dust and dirt and are easy to care for.



ALWAYS TAKE CARE
OF YOUR FLOOR



Oak Andante White
Live Pure

The cleaning products are adapted to the various surface treatments. As a general rule lacquered floors should be cleaned with synthetic cleaner (with no grease content) whereas oiled floors should be cleaned with soap (containing grease).

If it is necessary to wipe the floor, use the appropriate cleaning product for the type of flooring. Never pour water onto your hardwood flooring as the wood might swell and damage the floor. With regular use, a cleaning agent acts as a natural moisturizing agent and the floor surface will become more resistant to soiling and the appearance of wear and tear.

More technical information on

www.boen.com



Visit one of our
showrooms or
our digital showroom

Region: Scandinavia

BOEN AS
4658 Tveit, Norway
Phone: +47 38 06 66 00

Region: Western Europe

BOEN Parkett Deutschland GmbH
Papenkamp 2-6, 23879 Mölln,
Germany
Tel.: +49 4542 8003 0
boen.de@boen.com

Regions: Central and Eastern Europe

BOEN Lietuva, UAB
Siltnamiu Street 6, 21411 Kietaviskés,
Elektrėnu sav. Lithuania
Phone: +370 686 551 55

Region: France

Bauwerk Group France SARL
Savoie Hexapole / Actipole 4
242 Rue Maurice Herzog
FR-73420 Viviers-du-Lac
Telefon: +33 479 34 17 12

Regions: UK

Bauwerk Group UK Ltd
320-322 Beech Drive,
Hartlebury Trading Estate,
Hartlebury, Worcestershire, DY10 4JB
Phone: +44 (0) 800 652 5280

Regions: USA and Canada

BOEN Hardwood Flooring Inc.
1156 Pelican Bay Drive
Daytona Beach, FL 32119
Toll free: +1 877 638 3078

Region: Asia

Bauwerk Group Asia Ltd
Unit 1302D, 13/F Block B,
Seaview Estate, 4-6 Watson Road,
North Point, Hong Kong
Phone: +852 2367 1000 / 1012